



Penetrant Professor Approved

Product Data Sheet R-503 Cleaner/Remover



Met-L-Chek manufactures a complete line of solvent cleaners/removers used in the fluorescent (**Type 1**) and visible (**Type 2**) dye penetrant inspection process. All Met-L-Chek cleaner/removers are qualified to **AMS-2644** and are sold under the **Met-L-Chek®** and **Pen-Chek®** trademarks.

R-503 is a class 2 (non-halogenated), Method C inspection penetrant remover. It is designed for use in the solvent wipe technique for penetrant inspection in general metalworking, welding, nuclear and aerospace applications. It is a moderate dry rate material and is ideal for penetrant wipe removal and pre-inspection surface cleaning. As a pre-cleaner it is sprayed directly on the test surface. As a penetrant remover it is sprayed onto wiping media and then the penetrant wiped from the surface. The remover should not be sprayed directly on to the test surface to remove the excess penetrant as the sensitivity will be impaired.


R-503 is listed on the Qualified Products List for **AMS-2644**. It meets the requirements of **AMS-2647**, **ASME Boiler and Pressure Vessel Code Section V**, **ASTM E-165**, **ASTM E-1417**, **ISO- 3452**, and **Pratt & Whitney PMC #9094** for penetrant inspection materials. It is low in Sulfur, Chlorine, Fluorine and other Halogens, making it safe for use on Titanium and high Nickel alloys found in aerospace, medical and nuclear components.

R-503 is ideal for storing penetrant test panels in. The spray tube supplied with the aerosols is an effective way to clean out the star bust cracks on TAM panels.

R-503 is free of petroleum solvents. **R-503** is flammable and should not be used in confined spaces or near open flames or sparks.


Guide to METHOD "C" wipe off Processing per **ASTM E-1417**

1. Part must be clean, dry and at a temperature of 4.4°-52°C (40°- 125°F) before penetrant is applied.
2. Apply penetrant using spray, immersion, or wipe on.
3. Wait a minimum of 10 minutes; 20 minutes if temperature is 4.4°-10°C (40-50°F).
4. Moisten cloth with remover and wipe penetrant from surface. **Do not** spray remover on surface to remove penetrant, as sensitivity will be impaired.
5. Apply non aqueous developer **D-70**, by spraying.
6. Wait a minimum of 10 minutes before inspection.
7. For fluorescent **Type 1** penetrants use UV-A illumination of >1000 μw/cm² @ 15inches (38.1 cm) in a darkened area of <21 lux visible light (<2 footcandles). For visible **Type 2** penetrants use lighting of 1100 lux/m² (100 footcandles) minimum.

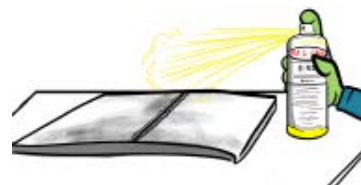


R-503 used as a pre-cleaner spray directly on test surface and wipe clean.

R-503 used as a penetrant remover. Spray on wiping media, and wipe remove penetrant.

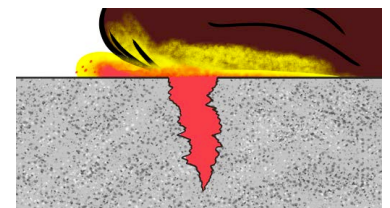

Common Indication Types

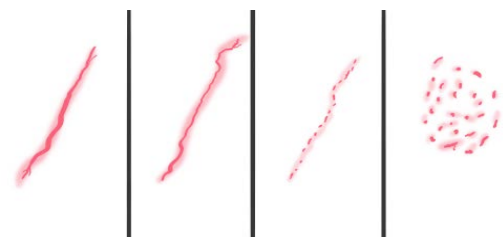



Penetrant Professor Approved

Product Data Sheet R-503 Cleaner/Remover



Typical Physical Properties

Form: clear liquid
 Density: 786 g/L
 Flash Point: >11.6°C (>53°F)
 Fluorescence: none
 Corrosion of aluminum: none
 Corrosion of carbon steel: none
 Corrosion of magnesium: none
 Corrosion of stainless steel: none
 Corrosion of titanium: none
 Residue: < 0.005 g/100 ml
 Chloride content: < 50 ppm (< 0.005%)
 Fluoride content: < 50 ppm (< 0.005%)
 Sulfur content: < 50 ppm (< 0.005%)
 Mercury: none
 VOC's: 786 g/L
 Ozone layer depleting substances: none
 PCB's: none

Specifications

AMS2644 **AMS 2647**
ASTM E165 **ASTM E1417**
MIL-STD-2132 **P&W PMC 9008**
EN ISO 3452-1 **EN ISO 3452-2**
RCC-M rev 2000
ASME B&PV Code Sec V
NAVSEA-T9074-AS-GIB-010/271

Product Availability

12 x 16oz (400ml) vol. aerosol (net wt 300g or 10.5oz)
 1 gallon (3.7L) metal can
 5 gallon (18.9L) metal pail



BEFORE USING ANY OF THESE PRODUCTS, YOU MUST BECOME COMPLETELY FAMILIAR WITH THE INFORMATION CONTAINED IN MCGEAN'S SAFETY DATA SHEETS. All information contained therein or in this document regarding handling, personal protection, and other safety measures must be followed during use. McGean presents the information herein without warranty and disclaims any liability, including any consequential, special, or indirect damages, arising from its use and misuse. Because the use, the conditions of use, product or product composition, and/or applicable laws may differ from one location to another and/or may change with time, the purchaser and/or user is solely responsible for determining whether the product is appropriate for use. McGean recommends use of this product solely in commercial processes which are specified by McGean and which do not violate any third-party patent rights or any laws or regulations or otherwise adversely impact human health and the environment. Users must make their own investigations and determine the suitability of the product for their particular purposes. McGean does not guarantee the accuracy of any data provided by its suppliers. MCGEAN MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE EXCEPT AS EXPRESSLY STATED IN THE SELLER'S SALES CONTRACT OR SALES ACKNOWLEDGEMENT FORM. USE OF ANY MCGEAN PRODUCT IS AT THE USER'S RISK.

Contact Us

United States
 McGean
 Phone: +1-216-441-4900
 Fax: +1-216-441-1377

United Kingdom
 McGean UK
 Phone: +44-1902-456563
 Fax: +44-1902-457443

Singapore
 McGean Singapore
 Phone: +65-6863-2296
 Fax: +65-6863-2297