

## Eldorado SR-125A

Eldorado SR-125A is a clear viscous, sealant re-mover, designed for removal of polysulfide sealants and polysulfide primer/polyurethane topcoat paint systems. SR-125A has a low vapor pressure, and therefore, evaporates slowly to maximize active dwell time on sealant.

### **Conforms To**

- Military
  - T.O. 1-1-8

McGean® recommends checking the most recent specifications for updated information.

### **Benefits**

- Viscous solvent, which may be applied to vertical, inclined surfaces.
- Safe on aluminum, magnesium, steel, high-strength steel, and other structural metals.
- Powerful – effectively dissolves and removes poly-sulfide sealant and adhesives.
- Contains no chlorinated solvents, phenols, chromates, heavy metals, or mercaptans.

### **Properties**

- Clear in color
- Mild odor

### **Notes Prior to Handling**


Before using your Cee-Bee® products, all safety and operating instructions should be read and understood. If you have any questions, please contact your Cee-Bee® representative before proceeding.

## Use Procedure

SR-125A is ready for use as supplied. Surfaces must be clean, free of water, and at a temperature below 100°F. Apply a medium thick layer to sealant or coating by spray, mop, or brush. Reapply as required to prevent drying and occasionally agitate the surface, for 30 minutes to 3 hours, until sealant is no longer attached. SR-125A may be left on overnight to promote softening and digestion of thick sealants. Agitate loosened sealant residue with brushing and squeegee or wipe material from the surface. Reapply SR-125A, as needed, to remaining sealant and repeat the removal process. Should residues remain, they are readily removed with cleaners or wipe solvent.

SR-125A softens or removes approximately 1/16 to 1/8 inch of polysulfide per application. For difficult jobs, such as removing thick layers of polysulfide sealant, mechanically remove most of the existing sealant by non-metallic (sharpened phenolic) scraper or sturdy poly bristle brush. This avoids excess processing time and minimizes product use and waste production.

**Note:** SR-125A is not intended for sealant removal use in aircraft fuel tanks. SR-125A is ineffective for removal of silicone, fluorinated, and thioether sealants and standard aircraft paint systems, such as epoxy primer with a polyurethane topcoat.

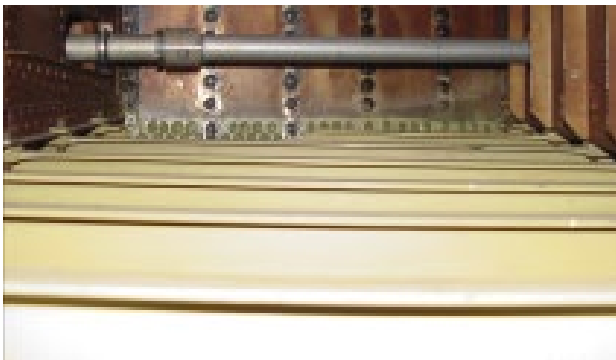

Before



After

## Safety, Handling, and Precautions

Before using your Cee-Bee® products, all safety and operating instructions should be read and understood. If you have any questions, please contact your Cee-Bee® representative before proceeding.

### Contact Us

---

#### United States

**McGean**

Phone: +1-216-441-4900

Fax: +1-216-441-1377

Email: [Aviation@McGean.com](mailto:Aviation@McGean.com)

#### United Kingdom

**McGean-Rohco (UK) Ltd.**

Phone: +44-1902-456563

Fax: +44-1902-457443

Email: [Aviation@McGean-Rohco.co.uk](mailto:Aviation@McGean-Rohco.co.uk)

---

#### Singapore

**McGean Singapore**

Phone: +65-6863-2296

Fax: +65-6863-2297

Email: [Info@ceebee.com.sg](mailto:Info@ceebee.com.sg)

#### China

**Cee-Bee Aviation Materials (Xiamen) Co. Ltd.**

Phone: +86-592-551-3689

Email: [Info@ceebee.com.cn](mailto:Info@ceebee.com.cn)

Eldorado SR-125A is a clear viscous, sealant re-mover, designed for removal of polysulfide sealants and polysulfide primer/polyurethane topcoat paint systems. SR-125A has a low vapor pressure, and therefore, evaporates slowly to maximize active dwell time on sealant.

**CAUTION:** Before using any of these products, you must become completely familiar with the safety and hazard information contained in our safety data sheets regarding these products. McGean-Rohco, Inc. (the seller) presents the information contained herein without warranty and disclaims any liability from its use or misuse. Seller recommends use of the information Seller's products solely in commercial processes which are specified by Seller and which do not violate any third party patent rights or any laws or regulations. The seller makes no warranties, express or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose except as expressly stated in the seller's sales contract or sales acknowledgement form.



**Revision: A1 (9/2025)**